



snuro

CATALOGUE 2022

Ropes, Chains,
Accessories & Steel wires



Snuro is Corbeo's international brand for ropes and accessories. With a wide range of products, Snuro targets retailers in the European market.

Snuro's offer includes natural and synthetic ropes, chains, steel wire and accessories.

In line with our vision of sustainability, the packaging is made with as little plastic as possible. The packaging contains the product information in 7 languages. As such, a divers European region can be serviced. Snuro offers a wide variety of ropes, twines and accessories, but is still focused on high-revenue items. We help retailers offering this specialised assortment without worries.

Corbeo NV

Poldergotestraat 22
9240 Zele - Belgium
BE0456681047

Internal sales department

Tel (+32) 52 46 97 80
Fax (+32) 52 47 63 91
sales@corbeo.be
www.corbeo.be

Table of contents

1	Ropes	
	Rope selector	8
	Polyamide	9
	Polypropylen	10
	Polyester	11
	Polyethylene	12
	Sisal	12
	Flax	13
	Synthetic flax	13
	Jute	14
	Cotton	14
	Elastic cord	15
2	Chains	
	Short link chain	18
	Long link chain	19
	Signaling chain	20
	Knotted chain	20
3	Steel wires	
	Galvanised	22
	Plastic coated	23
	Inox	23
4	Accessories	
	Spring pin	26
	Hook	27
	Grommet	27
	Rope extender	28
	Rope cleat	28
	Eye plate	28
	Eyelet bolt	29
	Turnbuckle	29
	Snap hook	30
	Quick link with screw	31
	Schackle	32
	Swivel	32
	Wire rope clip	33
	Thimble	34
	Rope pulley	34
	Split ring	35
5	Miscellaneous	37



Snuro is Corbeo's international brand for ropes and accessories. Corbeo is a Belgian family-run business specialised in the manufacture and supply of rope and string for retail and specific industrial applications.

Our company was founded in 1978 by the Ledent family. From the beginning there was a focus on rope, initially as an importer and as a wholesaler. In 2015, the company was taken over by the current managers. In line with their vision, there was a focus on investment in digitalisation and production. As a result, there has been a shift towards more local added value and nowadays a large part of the products are made and packaged in Belgium. With a team of 25 employees, we produce and distribute from our location in Zele over 5.000 different rope references, locally and internationally.

In the Benelux retail, Corbeo is the market leader with the Ledent brand, which offers a rope assortment with the largest choice on the market. With the Snuro brand, Corbeo targets European do-it-yourself shops that aim to offer a high-quality high-revenue rope assortment. Retailers or wholesalers with adequate volumes can use our experience for production under their own private label.

Corbeo cooperates with a worldwide network of specialised partners and rope manufacturers. Based on our specifications and quality control, they offer a steady supply of quality raw materials and semi-finished products.



MISSION

Passionate about binding!



VISION

As a flexible and local manufacturer with a focus on sustainability, we are the European rope-reference for retail and professional users.



VALUES

Honesty
Respect
Partnership
Craftmanship

CORPORATE SOCIAL RESPONSIBILITY

Corbeo wants to be a reference for sustainable qualitative products. We take our responsibility and adhere to different standards in this effort.



BSCI is a code of conduct for sustainable production chains; it signifies that factories meet standards that guarantee local working conditions.

SUSTAINABLE

We aim at sustainable products and a sustainable production and supply chain. We are convinced that optimizing our supply affects the sustainability of the finished products. To strengthen this vision it's our goal to manufacture most of our items in our own factory in order to reduce logistic impact and to avoid unnecessary carbon dioxide emissions. Our manufacturing runs on solar panels, natural products are our preferred primary material and we keep searching the optimal packaging.




BEPI is a code of conduct to reduce the ecological footprint in the entire supply chain. It covers guidelines as energy consumption, emissions of CO2 and management of chemical substances.

PRODUCTION

Our specialized equipment enables us to create and produce different rope items with unique characteristics. In our factory in Belgium we have twisting machines, automatic hank winding and precision winding machines, bobbin winders and packaging lines.

With this production capacity we create our own twines and private label items to serve our retail- and professional clients.



E-COMMERCE

Correct and comprehensive data is the key to online trading. Corbeo supports its retail customers in the development of their online channel. We actively cooperate with GS1 GDSN as the central point for article data. Our items are correctly documented, manufactured in accordance with the applicable standards, and provided with the necessary commercial descriptions. In addition, we also provide the necessary quality photos that support your sales.

Also in our own sales organisation we invest in online trading. With our B2B portal, clients can ask an account and easily order on their own. Some additional advantages for you: only articles available in stock are displayed, your own purchase price is visible, each product is complemented with a product image, etc..

POINT OF SALES PRESENTATION

We present our products in attractive concepts, supported by informative POS material. These concepts include all possible quality ropes, chains, steel cables and accessories to get any job done. Product information boards give the customer tips on the choices he/she has to make, and uniform packaging and clarifying 'passports' indicate the most important characteristics of the product.

In line with our vision of sustainability, the packaging is made with as little plastic as possible. The packaging contains the product information in 7 languages. As such, a divers European region can be serviced.



Explanation of symbols

Product information



Twisted rope



Braided rope

Reference

Our article reference

Colour

The colour is an indication of the product



Diameter of the product



Length of the product



Breaking force of the product. The breaking force of a rope depends on its diameter, quality, fibre and use.

Strands

Number of strands. This is specified for twines.

WLL

Working load limit.
Ropes: 1/10 of the breaking force;
Steel wire ropes: 1/5 of the breaking force.

PU

Packaging unit: this corresponds to the smallest possible packaging unit.

#/pc

Number of items in one piece of the SKU.



Synthetic



Natural



Chain inner width link



Chain outer width link



Chain inner length link

Presentation



Rope on a ball.



Rope on a spool with a tube inside.



A hank; hanking a rope is a way of storing a rope so that it doesn't get tangled.



Packaging with eurolock to present the product hanging in the point of sales presentation.



Rope on a reel or spool. A reel consists of two flanges with a tube in the middle. The advantage of this is that the rope can be uncoiled and consumed gradually.



Rope on a reel, but the reel is lying in the sales presentation. These products are sold by meter in stead of by whole reel.



Steel wire rope prepacked. It is possible to present the product hanging in the point of sales presentation.





Visual presentation of the product.

Ropes





Rope selector


NATURAL OR SYNTHETIC FIBRE

	Natural 	Synthetic 
Biodegradable	● ● ●	X
Outdoor use	● ●	● ● ●

BRAIDED OR TWISTED ROPE

	Braided 	Twisted 
Breaking force	● ●	● ● ●
Flexibility	● ● ●	● ●
Abrasion resistance	● ● ●	● ●

FEATURES

 Synthetic

 Natural 

	Synthetic			Natural		
	PA: polyamid Braided	PES: polyester Braided	PP: polypropylen Braided Twisted		Synthetic flax	CO: cotton LI: flax JU: jute SI: sisal
Breaking force	● ● ●	● ●	● ●	● ●	●	●
Abrasion resistance	● ● ●	● ● ●	● ●	●	●	●
Shock resistance	● ● ●	●	●	X	X	X
Moisture resistance	● ●	● ● ●	● ● ●	● ● ●	● ● ●	X
Soft to touch	● ● ●	● ●	● ●	●	● ● ●	● ●
UV resistance	● ●	● ● ●	●	●	●	● ●
Heat resistance	● ●	● ● ●	●	●	●	X
Acids resistance	X	●	●	●	●	X
Bases resistance	●	X	●	●	●	X
Floating ability	X	X	●	●	●	X

X NOT ● MODERATE ● ● GOOD ● ● ● VERY GOOD

Did you know that?


Ratio between the breaking force and the fibre for the same diameter:



Use affects the breaking force



Working load limit is 1/10 of the breaking force

 Always respect the working load limit
F.ex.: breaking force 100 kg = working load limit 10 kg

Moving loads require a higher breaking force than resting ones.

A perfect straight line? Use nylon (polyamide).

We recommend using a braided rope in combination with pulleys.



UV radiation weakens the breaking force by up to 50% per year.

Ropes




























Polyamide

A polyamide or nylon rope is a synthetic rope. It is known as strong and durable, with the highest tensile strength, elasticity, ability to absorb shock loads and resilience. It is a flexible and soft rope, which hardens in water. It absorbs water and sinks, but is resistant to rotting. Furthermore it is UV resistant, heat resistant and resistant to bases, but not to acids.















Braided rope



Colour	Reference		I—I			PU		
	7067527	2 mm	50 m	95 kg		6	-	5 411387 067527
	7067510	2 mm	50 m	95 kg		5	-	5 411387 067510
	7067411	3 mm	20 m	170 kg		1	✓	5 411387 067411
	7068173	3 mm	50 m	170 kg		1	-	5 411387 068173
	7067428	4 mm	20 m	275 kg		1	✓	5 411387 067428
	7068180	4 mm	50 m	275 kg		1	-	5 411387 068180
	7067435	5 mm	20 m	493 kg		1	✓	5 411387 067435
	7049745	5 mm	200 m	493 kg		1	-	5 411387 049745
	7067442	6 mm	20 m	622 kg		1	✓	5 411387 067442
	7067534	8 mm	20 m	1111 kg		1	✓	5 411387 067534

Bricklayers twine










Colour	Reference		I—I			PU	
	7067459	1 mm	100 m	30 kg		10	5 411387 067459
	7067466	1 mm	100 m	30 kg		10	5 411387 067466
	7067497	1,5 mm	70 m	50 kg		10	5 411387 067497
	7067503	1,5 mm	70 m	50 kg		10	5 411387 067503

Polypropylen

A polypropylene rope is a synthetic rope. It is strong and lightweight, but has little ability to absorb shocks and has only a minimal elasticity. It doesn't absorb water, doesn't rot but floats on water. Furthermore it is UV stabilized, heat resistant and resistant to bases and acids.






























Twine

Colour	Reference		I—I			PU	
	7067817	1 mm	50 m x 2	-		1	 5 411387 067817
	7067824	3 mm	50 m	110 kg		10	 5 411387 067824

















Twisted rope















































Colour	Reference		I—I			PU	
	7067725	4 mm	20 m	267 kg		5	 5 411387 067725
	7014972	4 mm	220 m	267 kg		1	 5 411387 014972
	7067732	6 mm	20 m	602 kg		5	 5 411387 067732
	7018987	6 mm	200 m	602 kg		1	 5 411387 018987
	7067749	8 mm	20 m	1061 kg		1	 5 411387 067749
	7043521	8 mm	100 m	1061 kg		1	 5 411387 043521
	7043798	10 mm	100 m	1561 kg		1	 5 411387 043798
	7043385	12 mm	65 m	2214 kg		1	 5 411387 043385

Braided rope



Colour	Reference		I—I			PU		
	7067664	3 mm	20 m	153 kg		1	✓	 5 411387 067664
	7067756	3 mm	20 m	153 kg		1	✓	 5 411387 067756
	7067671	4 mm	20 m	245 kg		1	✓	 5 411387 067671
	7067695	4 mm	20 m	245 kg		1	✓	 5 411387 067695











Colour	Reference		l—l			PU		
	7067688	5 mm	20 m	418 kg		1	✓	 5 411387 067688
	7067701	5 mm	20 m	418 kg		1	✓	 5 411387 067701
	7067763	6 mm	20 m	531 kg		1	✓	 5 411387 067763
	7067718	6 mm	20 m	531 kg		1	✓	 5 411387 067718
	7067770	8 mm	20 m	918 kg		1	✓	 5 411387 067770
	7068197	8 mm	20 m	918 kg		1	-	 5 411387 068197
	7067787	8 mm	20 m	918 kg		1	✓	 5 411387 067787
	7025930	8 mm	100 m	918kg		1	-	 5 411387 025930
	7067794	10 mm	20 m	1326 kg		1	✓	 5 411387 067794
	7068203	10 mm	20 m	1326 kg		1	-	 5 411387 068203
	7067800	10 mm	20 m	1326 kg		1	✓	 5 411387 067800
	7018093	10 mm	100 m	1326 kg		1	-	 5 411387 018093
	7018017	12 mm	65 m	1837 kg		1	-	 5 411387 018017

Polyester

A polyester rope is a synthetic rope. It is a strong, durable and heavy rope that remains flexible. The rope has a little elasticity, absorbs moisture and sinks but doesn't rot, shrink or stiffen. It's the best UV resistant synthetic rope, with a high heat resistance. Furthermore it is resistant to acids but not to bases.



Bricklayers twine

Colour	Reference		l—l			PU	
	7067473	1 mm	100 m	20 kg		10	 5 411387 067473
	7067480	1 mm	100 m	20 kg		10	 5 411387 067480

Braided rope



Colour	Reference		—			PU		
	7067602	3 mm	20 m	153 kg		1	✓	5 411387 067602
	7067619	4 mm	20 m	265 kg		1	✓	5 411387 067619
	7067626	5 mm	20 m	408 kg		1	✓	5 411387 067626
	7067633	6 mm	20 m	602 kg		1	✓	5 411387 067633
	7019069	8 mm	100 m	1051 kg		1	-	5 411387 019069
	7018314	10 mm	100 m	1663 kg		1	-	5 411387 018314

Polyethylene

A polyethylene rope is a synthetic rope. It is a smooth rope with low tensile strength. It doesn't absorb moisture but floats on water. Furthermore it is fairly heat resistant and resistant to acids and bases.



Braided rope



Colour	Reference		—			PU	
	7067640	3,5 mm	50 m	100 kg		5	5 411387 067640
	7067657	3,5 mm	50 m	100 kg		5	5 411387 067657

Sisal

Sisal is a natural fibre, and thus biodegradable. It is coarse, hairy and easy to knot. Sisal expands in dry conditions and shrinks when wet. It is UV resistant.



Twine

Colour	Reference	Strands		—			PU	
	7067879	2	2,5 mm	± 30 m	65 kg		10	5 411387 067879
	7067855	2	2,5 mm	± 50 m	65 kg		10	5 411387 067855
	7067862	2	2,5 mm	± 140 m	65 kg		6	5 411387 067862
	7068210	3	3 mm	± 180 m	90 kg		4	5 411387 068210

Twisted rope



Colour	Reference		—			PU	
	7067831	6 mm	20 m	265 kg		5	5 411387 067831
	7044610	6 mm	200 m	265 kg		1	5 411387 044610
	7067848	8 mm	20 m	485 kg		1	5 411387 067848
	7043880	8 mm	100 m	485 kg		1	5 411387 043880
	7044955	10 mm	100 m	633 kg		1	5 411387 044955
	7044627	12 mm	65 m	959 kg		1	5 411387 044627

Flax

Flax is a natural fibre, and thus biodegradable. It is durable, strong and soft to touch. It absorbs moisture, sinks and shrinks when wet. It is UV resistant.



Twine

Colour	Reference		—			PU	
	7067909	1,5 mm	± 65 m	12 kg		10	5 411387 067909
	7067893	1 mm	± 90 m	15 kg		10	5 411387 067893
	7067886	1 mm	± 40 m	15 kg		10	5 411387 067886
	7068227*	1 mm	± 90 m	15 kg		10	5 411387 068227

* Bleached flax, can be used for food applications

Synthetic flax







Synthetic flax is a synthetic rope with the appearance of natural rope. It is flexible and soft with little to no elasticity. It doesn't absorb moisture nor rot, but floats. Furthermore it is fairly heat resistant and resistant to acids and bases.



Twisted rope



Colour	Reference		—			PU	
	7067916	6 mm	20 m	310 kg		1	5 411387 067916




Colour	Reference	⊘	l-l	⚖	👁	PU	
	7068234	8 mm	20 m	480 kg		1	 5 411387 068234
	7068241	10 mm	20 m	830 kg		1	 5 411387 068241

Jute

Jute is a natural fibre, and thus biodegradable. It is soft, flexible and hairy with minimal elasticity, a limited moisture resistance but is UV resistant.



Twine







Colour	Reference	⊘	l-l	⚖	👁	PU	
	7067114	2,5 mm	± 75 m	28 kg		5	 5 411387 067114

Cotton

















Cotton is a natural fibre, and thus biodegradable. It feels soft to touch and is flexible, but it is the least strong natural fibre with a minimal elasticity. Cotton is highly moisture absorbent and UV resistant. It doesn't discolour or weaken with exposure to sunlight.



Twine

Colour	Reference	⊘	l-l	⚖	👁	PU	
	7067381	1,5 mm	± 125 m	5 kg		10	 5 411387 067381
	7067398	1,5 mm	± 65 m	16 kg		10	 5 411387 067398
























Braided rope


Colour	Reference	⊘	l-l	⚖	👁	PU		
	7068166	3 mm	24 m	32 kg		10	-	 5 411387 068166
	7068135	3 mm	20 m	46 kg		1	✓	 5 411387 068135
	7067404	3 mm	100 m	46 kg		5	-	 5 411387 067404
	7068142	4 mm	20 m	78 kg		1	✓	 5 411387 068142
	7068159	5 mm	10 m	128 kg		1	✓	 5 411387 068159

Elastic cord

An elastic cord can be used frequently for various applications. The bungees are of professional quality, weather-resistant, water-repellent and wear-resistant. The elastic can be used countless times and always returns to its original size. An elastic cord is not the same as the ropes mentioned above, so the characteristics of the ropes aren't applicable for bungees. The bungees have a core from natural rubber or latex and a mantle of braided polyester.



Colour	Reference					PU		
	7067558	4 mm	15 cm x 10 pc	30 kg		1	✓	 5 411387 067558
	7067572	6 mm	10 m	80 kg		1	✓	 5 411387 067572
	7003907	6 mm	100 m	80 kg		1	-	 5 411387 003907
	7043125	6 mm	100 m	80 kg		1	-	 5 411387 043125
	7067589	8 mm	10 m	80 kg		1	✓	 5 411387 067589
	7067565	10 mm	10 m	80 kg		1	✓	 5 411387 067565

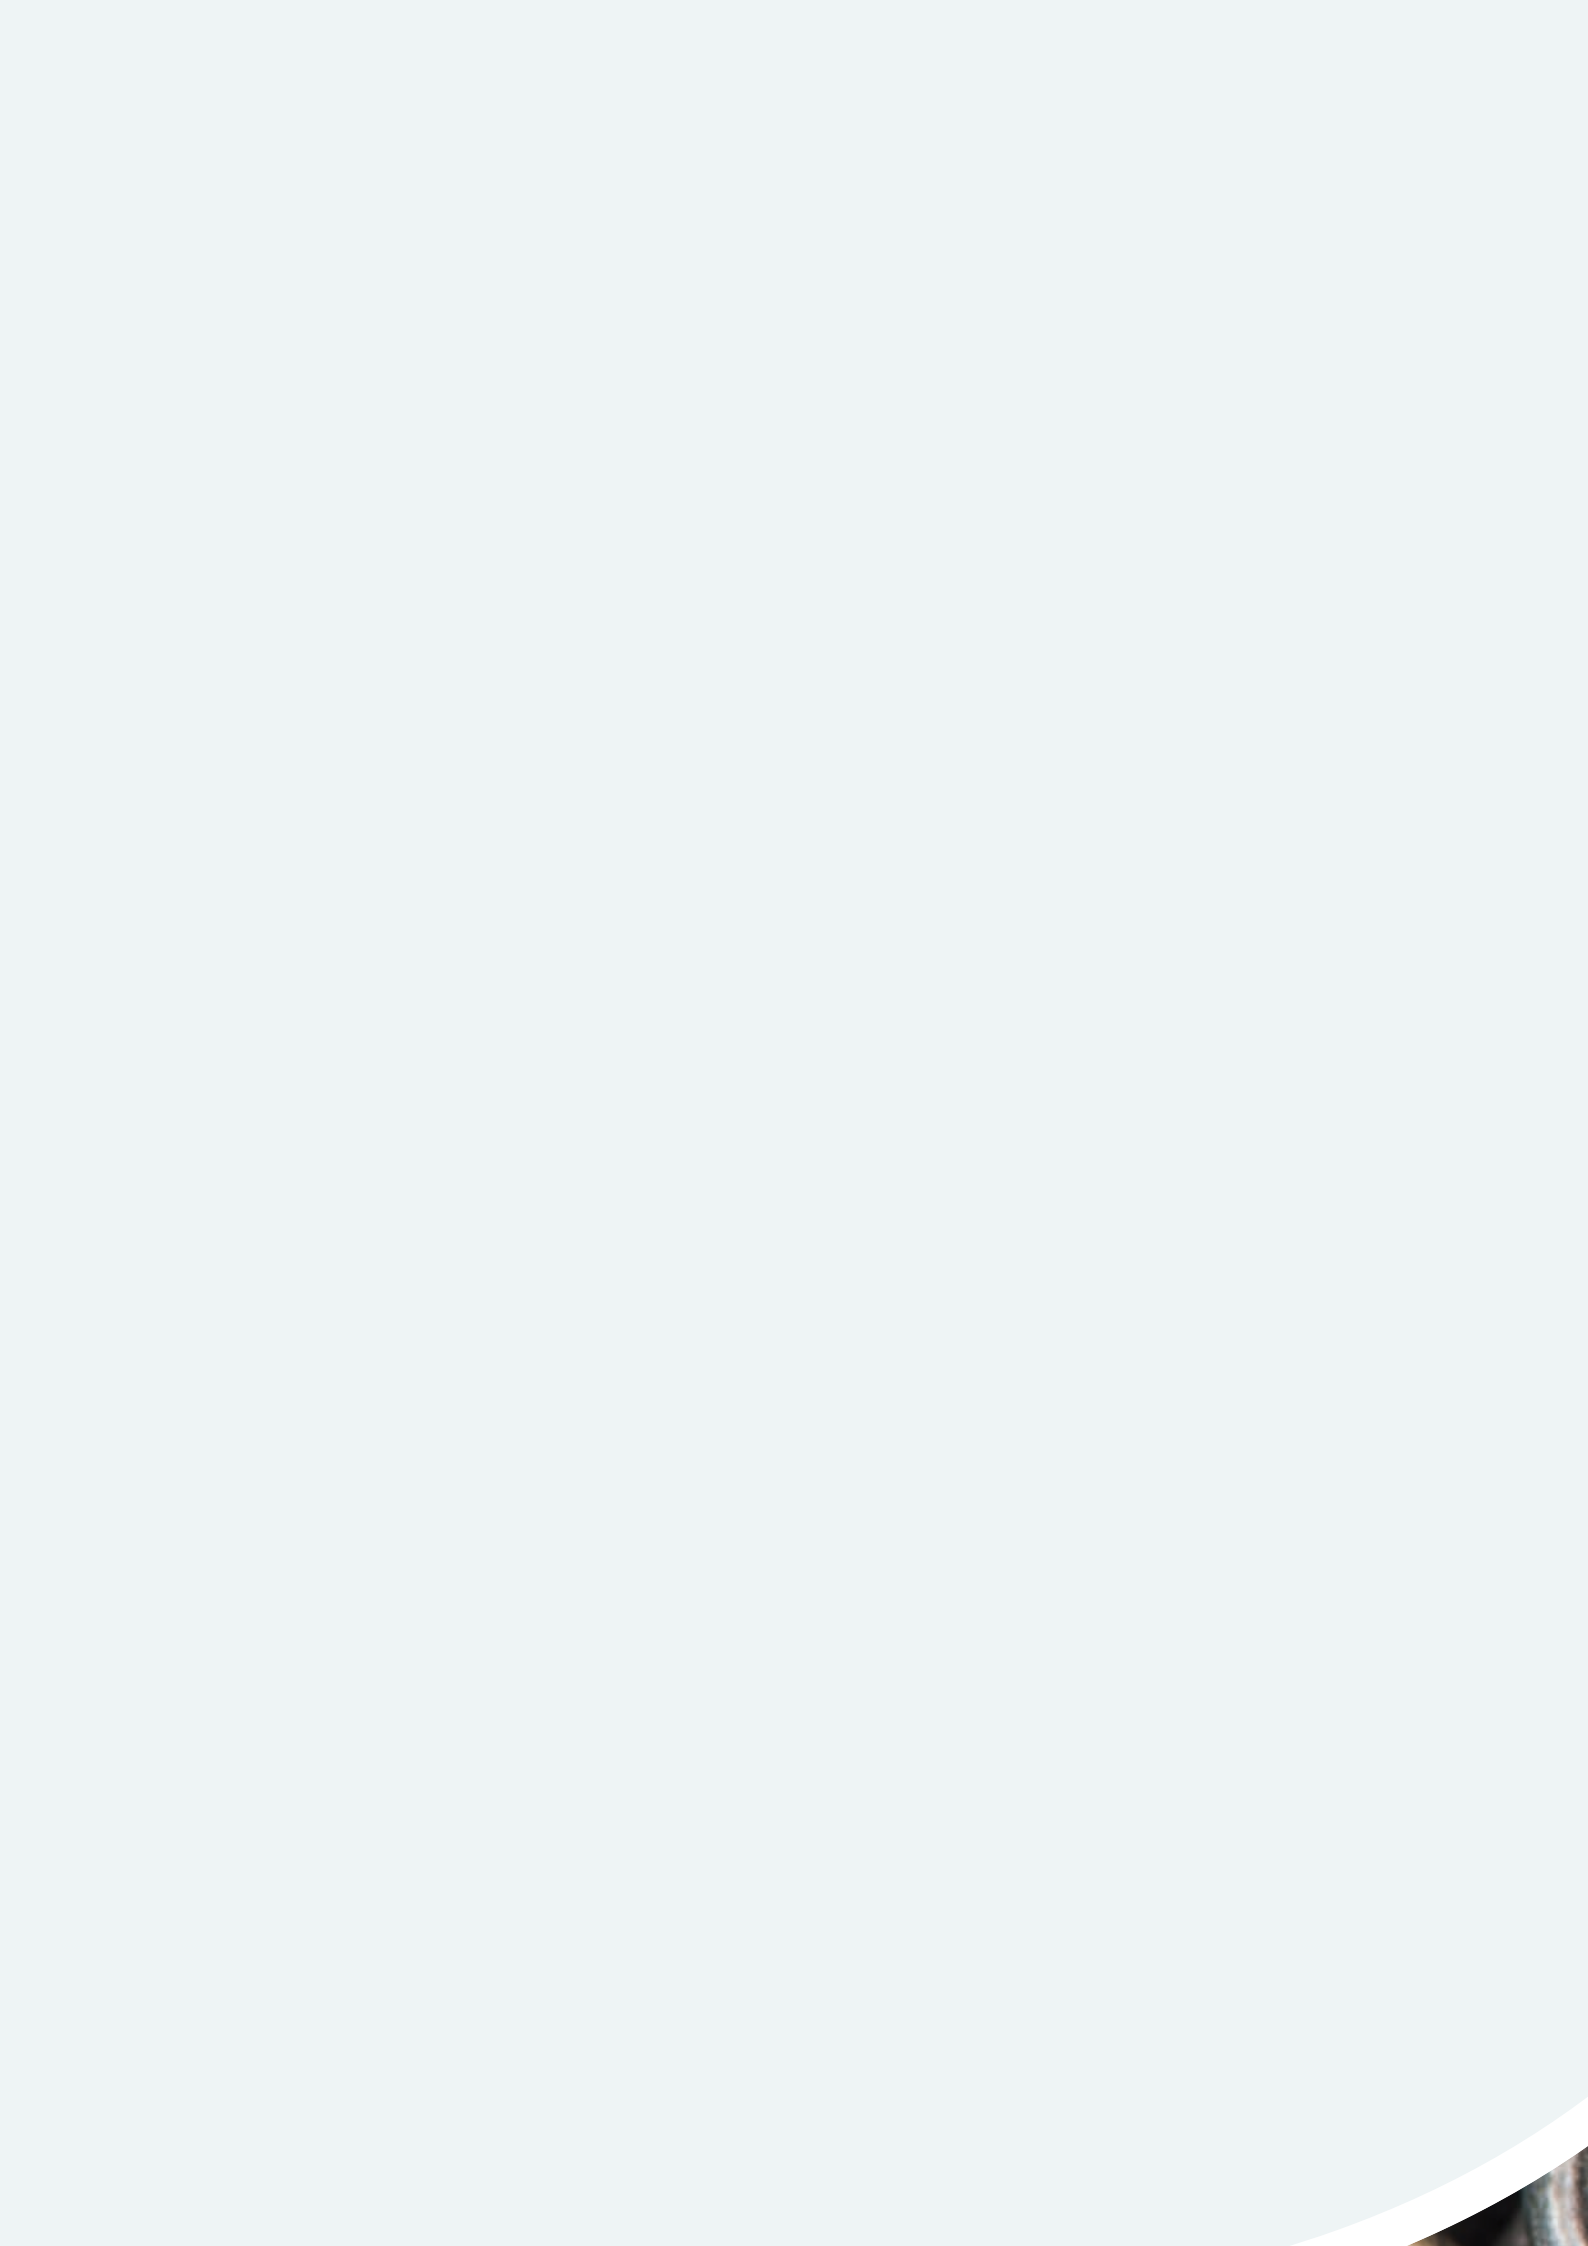

Chains



Types of chains

Chains make it possible to create a flexible yet sturdy connection. A chain consists of interconnected links that are tied together into a movable line.




SHORT LINK CHAIN (TYPE A)

For safety and heavy duty work. Short link chains typically originate from maritime use where an anchor chain must be wound onto a shaft. The short links make the chain winding easier. This is also the case for chains used in winches etc.




SIGNALING CHAIN

For decoration, suspension and signaling. Not suitable for heavy work.

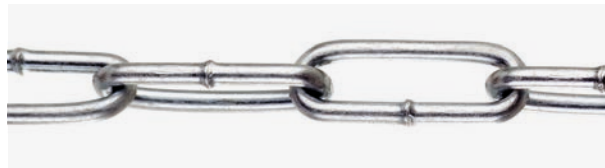

LONG LINK CHAIN (TYPE C)

For safety and heavy duty work. A long link chain is usually cheaper because there's less metal per link per meter. The longer link makes it more difficult to wind the chain. This type of chain is used if it is left 'open', f.ex. as a barrier chain.

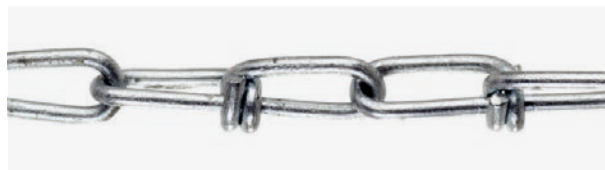

KNOTTED CHAIN

For decoration, suspension and signaling. Not suitable for heavy work.









Chains

Short link chain (type A)

Chain with short links, also known as chain type A. The chain is used for safety and heavy duty work. Short link chains typically originate from maritime use where an anchor chain must be wound onto a shaft. The short links make the chain winding easier. This is also the case for chains used in winches etc.




















Material	Reference		—				PU	
Zinc plated	7059263	2 mm	5 m	3,5 mm	12 mm		1	5 411387 059263
Zinc plated	7024780	2 mm	60 m	3,5 mm	12 mm		1	5 411387 024780
Zinc plated	7059737	3 mm	5 m	5,5 mm	16 mm		1	5 411387 059737
Zinc plated	7024827	3 mm	30 m	5,5 mm	16 mm		1	5 411387 024827
Zinc plated	7059898	4 mm	3 m	7 mm	19 mm		1	5 411387 059898
Zinc plated	7024803	4 mm	30 m	7 mm	19 mm		1	5 411387 024803
Zinc plated	7060023	5 mm	2 m	9 mm	21 mm		1	5 411387 060023

Material	Reference						PU	
Zinc plated	7024858	5 mm	30 m	9 mm	21 mm		1	5 411387 024858
Zinc plated	7024872	6 mm	15 m	11 mm	24 mm		1	5 411387 024872

Long link chain (type C)

Chain with long links, also known as chain type C. The chain is used for safety and heavy duty work. A long link chain is usually cheaper because there's less metal per link per meter. The longer link makes it more difficult to wind the chain. This type of chain is used if it is left 'open', f.ex. as a barrier chain.









Material	Reference						PU	
Zinc plated	7060085	2 mm	5 m	3,5 mm	22 mm		1	5 411387 060085
Zinc plated	7024971	2 mm	60 m	3,5 mm	22 mm		1	5 411387 024971
Zinc plated	7060092	3 mm	5 m	5,5 mm	26 mm		1	5 411387 060092
Zinc plated	7024988	3 mm	30 m	5,5 mm	26 mm		1	5 411387 024988
Zinc plated	7060924	4 mm	3 m	7 mm	32 mm		1	5 411387 060924
Zinc plated	7025060	4 mm	30 m	7 mm	32 mm		1	5 411387 025060
Stainless steel	7025077	4 mm	30 m	7,2 mm	32 mm		1	5 411387 025077
Zinc plated	7061105	5 mm	2 m	9 mm	35 mm		1	5 411387 061105
Zinc plated	7025176	5 mm	30 m	9 mm	35 mm		1	5 411387 025176
Zinc plated	7025213	6 mm	15 m	11 mm	42 mm		1	5 411387 025213
Zinc plated	7025251	8 mm	10 m	14 mm	52 mm		1	5 411387 025251

Signaling chain

The signaling chain is the typically red-white plastic chain, used often to define an area.




Material	Colour	Reference	⌀	l-l	⊕	👁️	PU	
Plastic		7025305	6 mm	25 m	8 mm		1	 5 411387 025305
Plastic		7025312	6 mm	25 m	8 mm		1	 5 411387 025312

Knotted chain

The knotted chain is a decorative chain used for decoration, suspension, hanging and signaling.



Material	Reference	⌀	l-l	⊕	⊕	👁️	PU	
Zinc plated	7025381	1,6 mm	60 m	7 mm	22 mm*		1	 5 411387 025381
Zinc plated	7025398	1,8 mm	90 m	8 mm	25 mm*		1	 5 411387 025398
Zinc plated	7025459	2,2 mm	60 m	10 mm	31 mm*		1	 5 411387 025459
Zinc plated	7025473	3,1 mm	30 m	14 mm	40 mm*		1	 5 411387 025473

* Inner length of 2 links

Steel wires




Types of steel wires

A steel wire has a greater tensile force than rope and does not stretch or shrink. It is a robust, hard-wearing and sturdy material. A steel cable consists of several wires twisted into strands and lying around a core. The working load limit is 1/5 of the breaking force.



GALVANISED STEEL CABLE

Galvanised steel has a coating of zinc on its surface. The zinc coating prevents corrosion.



GALVANISED STEEL CABLE + PLASTIC COATED

Due to the plastic coating (pvc coated), the steel wire is protected, and avoiding harm to people or goods.



INOX CABLE

Stainless steel has a much higher corrosion resistance than galvanized steel. It is recommended in high corrosive environments, such as wet, salty or often cleaned environments.









Steel wires

Galvanised steel cable

Galvanised steel has a coating of zinc on its surface. The zinc coating prevents corrosion.












Reference	∅	l—l	⚖	👁	PU	Barcode
7061136	1 mm	10 m	55 kg	👁	1	5 411387 061136
7062591	2 mm	10 m	240 kg	👁	1	5 411387 062591
7063857	2 mm	20 m	240 kg	👁	1	5 411387 063857
7062195	2 mm	300 m	240 kg	🌀	1	5 411387 062195
7061358	2,5 mm	15 m	370 kg	👁	1	5 411387 061358
7065165	3 mm	10 m	500 kg	👁	1	5 411387 065165
7065493	3 mm	20 m	500 kg	👁	1	5 411387 065493
7062164	3 mm	250 m	500 kg	🌀	1	5 411387 062164

Reference					PU	
7062065	4 mm	10 m	900 kg		1	5 411387 062065
7065677	4 mm	20 m	900 kg		1	5 411387 065677
7062157	5 mm	10 m	1450 kg		1	5 411387 062157

Steel cable plastic coated

Due to the plastic coating (pvc coated), the steel wire is protected, and avoiding harm to people or goods.










Reference					PU	
7061327	2,3 mm	10 m	100 kg		1	5 411387 061327
7065509	4 mm	20 m	500 kg		1	5 411387 065509
7062270	4 mm	90 m	500 kg		1	5 411387 062270
7065752	6 mm	10 m	1450 kg		1	5 411387 065752

Inox cable

Stainless steel has a much higher corrosion resistance than galvanised steel. It is recommended in high corrosive environments, such as wet, salty or often cleaned environments.



Reference					PU	
7061808	3 mm	10 m	500 kg		1	5 411387 061808
7062300	3 mm	150 m	500 kg		1	5 411387 062300

Accessories



Types of accessories

Generally, accessories are used with ropes, chains and/or steel wires to hang, connect, extend, block, fixate, protect, suspend, aggregate and tight. There are countless combinations possible and each accessory has its own advantages and disadvantages (both functional and personal preference). The images below give a first impression of possible uses.



D-SCHACKLE


QUICK LINK

WIRE ROPE CLIP DUPLEX

QUICK LINK WITH SCREW

SWIVEL

S-HOOK

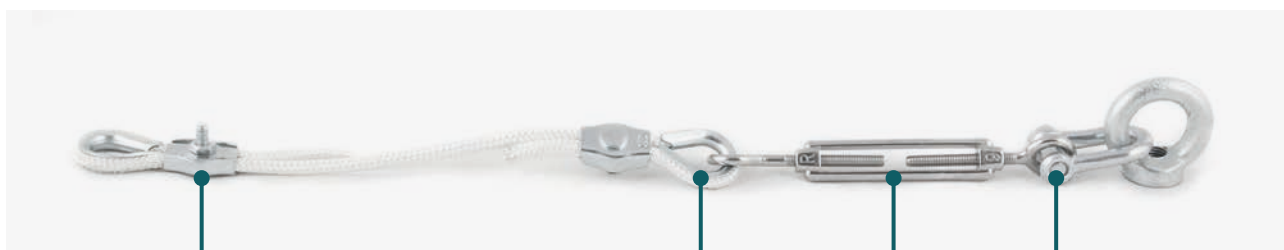


WIRE ROPE CLIP SIMPLEX

THIMBLE

TURNBUCKLE

D-SCHACKLE

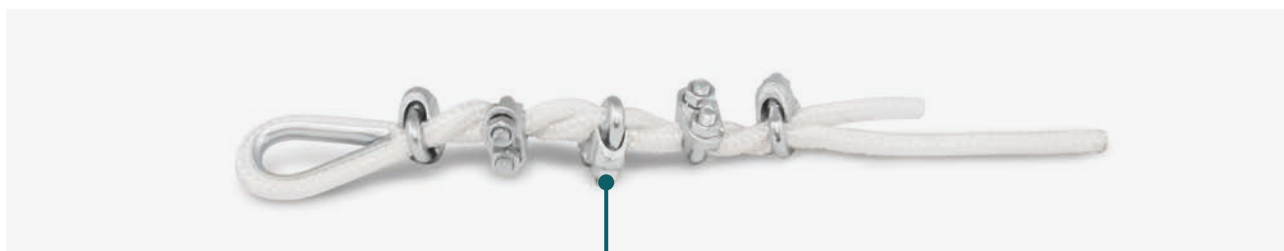

WIRE ROPE CLIP

Accessories



Spring pin

A spring pin positions a part on a shaft. It is used as a positioning point or as a locking device.



Spring pin	Material	Reference	A	B	C	#/pc	PU	
	Zinc plated	7056866	18 mm	3 mm	60 mm	2	1	 5 411387 056866
	Zinc plated	7067596	20 mm	4 mm	60 mm	2	1	 5 411387 067596

Hook



An S-hook is a double-sided hook with infinite functional and decorative uses, especially for hanging light objects. The S-hook exists as an open or closed hook.

S-hook	Material	Reference	A	B	C	#/pc	PU	
	Zinc plated	7055517	3 mm	3 mm	25 mm	4	1	
	Zinc plated	7055524	4,5 mm	4 mm	35 mm	2	1	
	Zinc plated	7055562	6,5 mm	5 mm	45 mm	2	1	
S-hook closed	Material	Reference	A	B	C	#/pc	PU	
	Brass	7056927	20 mm	30 mm	-	6	1	
	Brass	7056934	30 mm	40 mm	-	6	1	
Meat hook	Material	Reference	A	B	C	#/pc	PU	
	Zinc plated	7056286	4 mm	23 mm	80 mm	2	1	
	Zinc plated	7056859	5 mm	28 mm	100 mm	2	1	

Grommet







A grommet is a two-part piece of hardware that is pressed together through a pre-punched hole in a piece of fabric. For easy and quick attachment of tarpaulins, hammocks or other cloths or sails. The use of a grommet prevents the material from tearing.

Grommet	Material	Reference	A	B	C	#/pc	PU	
	Brass	7055968	11 mm	-	-	20	1	
Grommet + punch tool	Material	Reference	A	B	C	#/pc	PU	
	Brass	7055975	11 mm	-	-	15	1	

Rope extender

This rope adjuster, or rope shortener, makes shortening rope very easy. This is often used to adjust the rope of swing sets.







Rope extender	Material	Reference	A	B	C	#/pc	PU	
	Zinc plated	7057238	6 mm	70 mm	-	2	1	 5 411387 057238
	Zinc plated	7057221	7 mm	70 mm	-	1	1	 5 411387 057221

Rope cleat

A rope cleat is used to tightly wind and block a cord.








Rope cleat	Material	Reference	A	B	C	#/pc	PU	
	Zinc plated	7056125	70 mm	-	-	2	1	 5 411387 056125
	Nickel plated	7056279	110 mm	-	-	1	1	 5 411387 056279
	White polished	7056118	110 mm	-	-	1	1	 5 411387 056118

Eye plate

An eye plate is used as an anchor point for attaching things, and is available with or without a swivel ring.



Eye plate	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7057214	5,2 mm	40 mm	26 mm	18 mm	1	1	 5 411387 057214
	Zinc plated	7055944	5,2 mm	50 mm	33 mm	20 mm	1	1	 5 411387 055944
Eye plate with ring	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7068111	50 mm	50 mm	8 mm	50 mm	1	1	 5 411387 068111

Eyelet bolt



An eye bolt is perfect for anchoring cables and ropes. The threaded shaft enables it to be fitted into different surfaces. Due to the metal loop, a secure fixing is created.

Eyelet bolt	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7057290	17 mm	8 mm	100 mm	95 mm	2	1	 5 411387 057290
	Zinc plated	7057313	21 mm	10 mm	80 mm	75 mm	2	1	 5 411387 057313

Turnbuckle



A turnbuckle is used to put a cable or rope under tension. With a simple turn you can release or tighten.




Hook - eye	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7056828	50 mm	M5	95 mm	8 mm	2	1	 5 411387 056828
	Zinc plated	7057504	70 mm	M5	120 mm	8 mm	2	1	 5 411387 057504
	Stainless steel	7057542	70 mm	M5	120 mm	8 mm	1	1	 5 411387 057542
	Zinc plated	7056842	60 mm	M6	110 mm	10 mm	2	1	 5 411387 056842
	Stainless steel	7057627	90 mm	M6	160 mm	9 mm	1	1	 5 411387 057627
	Zinc plated	7057665	110 mm	M8	170 mm	11 mm	2	1	 5 411387 057665
	Zinc plated	7057481	80 mm	M10	150 mm	12 mm	1	1	 5 411387 057481





Eye - eye	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7056354	50 mm	M5	95 mm	8 mm	2	1	 5 411387 056354
	Zinc plated	7056835	60 mm	M6	110 mm	10 mm	2	1	 5 411387 056835













Snap hook








A snap hook is used to quickly and easily make temporary connections that need to be disconnected again.

Simplex hook	Material	Reference	A	B	C	D	E	WLL	#/pc	PU	
	Zinc plated	7057245	40 mm	-	-	-	-	-	2	1	
	Zinc plated	7057252	50 mm	-	-	-	-	-	2	1	

Snap hook	Material	Reference	A	B	C	D	E	WLL	#/pc	PU	
	Nickel plated	7056224	50 mm	-	-	-	-	-	2	1	
	Nickel plated	7056293	72 mm	-	-	-	-	-	1	1	
	Nickel plated	7056330	80 mm	-	-	-	-	-	1	1	









Carabiner	Material	Reference	A	B	C	D	E	WLL	#/pc	PU	
	Zinc plated	7056231	4 mm	20 mm	40 mm	7 mm	7 mm	20 kg	2	1	
	Zinc plated	7056248	5 mm	25 mm	50 mm	8 mm	7 mm	45 kg	2	1	
	Stainless steel	7055234	5 mm	25 mm	50 mm	8 mm	7 mm	45 kg	2	1	
	Aluminium	7056262	6 mm	30 mm	60 mm	6 mm	8 mm	-	2	1	
	Zinc plated	7056255	6 mm	30 mm	60 mm	9 mm	8 mm	60 kg	2	1	
	Zinc plated	7056309	7 mm	35 mm	70 mm	10 mm	8 mm	90 kg	1	1	
	Zinc plated	7056316	8 mm	40 mm	80 mm	12 mm	9 mm	110 kg	1	1	
	Stainless steel	7055326	8 mm	40 mm	80 mm	12 mm	9 mm	110 kg	1	1	
	Steel - black	7057153	8 mm	40 mm	80 mm	12 mm	9 mm	110 kg	1	1	
	Zinc plated	7056347	10 mm	50 mm	100 mm	15 mm	11 mm	180 kg	1	1	
	Stainless steel	7055425	10 mm	50 mm	100 mm	15 mm	11 mm	180 kg	1	1	

With eyelet	Material	Reference	A	B	C	D	E	WLL	#/pc	PU	
	Stainless steel	7057160	6 mm	30 mm	60 mm	5 mm	8 mm	60 kg	1	1	
	Stainless steel	7057177	8 mm	40 mm	80 mm	10 mm	9 mm	110 kg	1	1	
With angle	Material	Reference	A	B	C	D	E	WLL	#/pc	PU	
	Stainless steel	7057191	6 mm	9 mm	60 mm	10 mm	-	50 kg	1	1	

Quick link with screw

A quick link with screw is used as a connection element between components. It's a fast and easy connection for permanent or temporary applications.

















Quick link with screw	Material	Reference	A	B	C	D	WLL	#/pc	PU	
	Zinc plated	7055982	5,5 mm	4 mm	40 mm	19,5 mm	220 kg	2	1	
	Stainless steel	7055036	5,5 mm	4 mm	40 mm	19,5 mm	220 kg	2	1	
	Zinc plated	7056002	6,5 mm	5 mm	50 mm	23 mm	290 kg	2	1	
	Stainless steel	7055043	6,5 mm	5 mm	50 mm	23 mm	290 kg	2	1	
	Zinc plated	7055999	7,5 mm	6 mm	60 mm	26,5 mm	390 kg	2	1	
	Stainless steel	7055173	7,5 mm	6 mm	60 mm	26,5 mm	390 kg	1	1	
Zinc plated	7056019	10,5 mm	8 mm	75 mm	34 mm	690 kg	1	1		

Schackle

Schackles are used in lifting systems and as a replaceable component for connections. They are the primary connecting link in all rigging systems. A H-schackle, anchor schackle or cambered schackle will be used with multiple applications, a D-schackle with single applications.






D-schackle	Material	Reference	A	B	C	WLL	#/pc	PU	
	Zinc plated	7055456	10 mm	17 mm	5 mm	80 kg	2	1	
	Stainless steel	7054718	10 mm	17 mm	5 mm	80 kg	2	1	
	Zinc plated	7055463	12 mm	21 mm	6 mm	100 kg	2	1	
	Stainless steel	7054725	12 mm	21 mm	6 mm	100 kg	2	1	
	Zinc plated	7055470	16 mm	28 mm	8 mm	170 kg	2	1	
	Stainless steel	7054732	16 mm	28 mm	8 mm	170 kg	2	1	
	Zinc plated	7055487	20 mm	35 mm	10 mm	320 kg	1	1	

H-schackle	Material	Reference	A	B	C	WLL	#/pc	PU	
	Zinc plated	7055432	10 mm	20 mm	5 mm	80 kg	2	1	
	Zinc plated	7057092	16 mm	32 mm	8 mm	170 kg	1	1	
	Zinc plated	7055449	20 mm	40 mm	10 mm	320 kg	1	1	

Swivel

A swivel is created to prevent a rope or cable from twisting and potentially breaking.





























Swivel	Material	Reference	A	B	C	D	#/pc	PU	
	Nickel plated	7057719	5 mm	60 mm	-	-	1	1	
	Stainless steel	7054923	6 mm	65 mm	-	-	1	1	

Wire rope clip

A wire rope clip is used in a detachable termination or to form an end termination. They are used to form a wire rope eye, to connect two cables together or to clamp the loose end of a length of wire rope.








Wire rope clip	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7055630	20 mm	5 mm	M4	-	4	1	
	Stainless steel	7054749	20 mm	5 mm	M4	-	4	1	
	Zinc plated	7056941	19 mm	5 mm	M5	-	4	1	
	Stainless steel	7054800	22 mm	6 mm	M5	-	2	1	
	Zinc plated	7055814	24 mm	6 mm	M5	-	4	1	
	Stainless steel	7054862	24 mm	7 mm	M5	-	2	1	
	Zinc plated	7055821	28 mm	8 mm	M5	-	2	1	
	Stainless steel	7054909	28 mm	8 mm	M5	-	2	1	
	Zinc plated	7056958	34 mm	10 mm	M6	-	2	1	
	Zinc plated	7056965	42 mm	11 mm	M8	-	2	1	
Wire rope clip simplex	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7055906	2 mm	4 mm	18 mm	M4	2	1	
	Zinc plated	7055913	3 mm	6 mm	20 mm	M4	2	1	
	Zinc plated	7057276	4 mm	8 mm	21,5 mm	M5	2	1	
	Zinc plated	7057283	5 mm	10 mm	26 mm	M5	2	1	

Wire rope clip duplex	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7056880	2 mm	4 mm	37 mm	M4	2	1	
	Zinc plated	7055920	3 mm	6 mm	40 mm	M4	2	1	
	Stainless steel	7054855	3 mm	6 mm	40 mm	M4	2	1	
	Zinc plated	7055937	4 mm	8 mm	43 mm	M5	2	1	
	Zinc plated	7057269	5 mm	10 mm	52 mm	M6	2	1	
	Zinc plated	7056897	6 mm	12 mm	60 mm	M6	2	1	

Thimble

Use a thimble in a fixed loop in the end of a rope to protect the tied, spliced or swaged rope from wear. The wire rope eye helps prevent deformation, kinking, crushing, and fraying of the wire rope while in use.





Thimble	Material	Reference	A	B	C	D	#/pc	PU	
	Zinc plated	7055616	12 mm	3 mm	-	-	4	1	
	Stainless steel	7055210	10 mm	3 mm	-	-	4	1	
	Zinc plated	7055623	13 mm	4 mm	-	-	2	1	
	Stainless steel	7055227	11 mm	4 mm	-	-	4	1	

Rope pulley

A pulley is used to pull or lift objects with ease; it helps to multiply the forces. A pulley consists of one or more wheels over which a rope is looped.



Rope pulley	Material	Reference	A	B	C	D	WLL	#/pc	PU
	Zinc plated	7057009 ¹	11 mm	20 mm	6 mm	60 mm	20 kg	1	1
	Zinc plated	7057054 ²	22 mm	40 mm	10 mm	99 mm	40 kg	1	1
Pulley	Material	Reference	A	B	C	D	WLL	#/pc	PU
	Zinc plated	7056323	6 mm	32 mm	-	-	15 kg	1	1


Pulley with screw	Material	Reference	A	B	C	D	WLL	#/pc	PU	
	Zinc plated	7068128	32 mm	6 mm	-	-	15 kg	1	1	 5 411387 068128
	Zinc plated	7057016	40 mm	6 mm	-	-	20 kg	1	1	 5 411387 057016
	Zinc plated	7057047	60 mm	8 mm	-	-	40 kg	1	1	 5 411387 057047
Pulley with hook	Material	Reference	A	B	C	D	WLL	#/pc	PU	
	Steel	7074501 ³	75 mm	20 mm	-	-	150 kg	1	1	 5 411387 074501
	Steel	7067947 ³	100 mm	20 mm	-	-	150 kg	1	1	 5 411387 067947
	Steel	7067930 ³	120 mm	20 mm	-	-	150 kg	1	1	 5 411387 067930


¹ Fixed eye² Rotating eye³ Rotating hook

Split ring

An assortment of rings with different sizes.



Split ring	Material	Reference	#/pc	PU	
	Zinc plated	7055951	8	1	 5 411387 055951

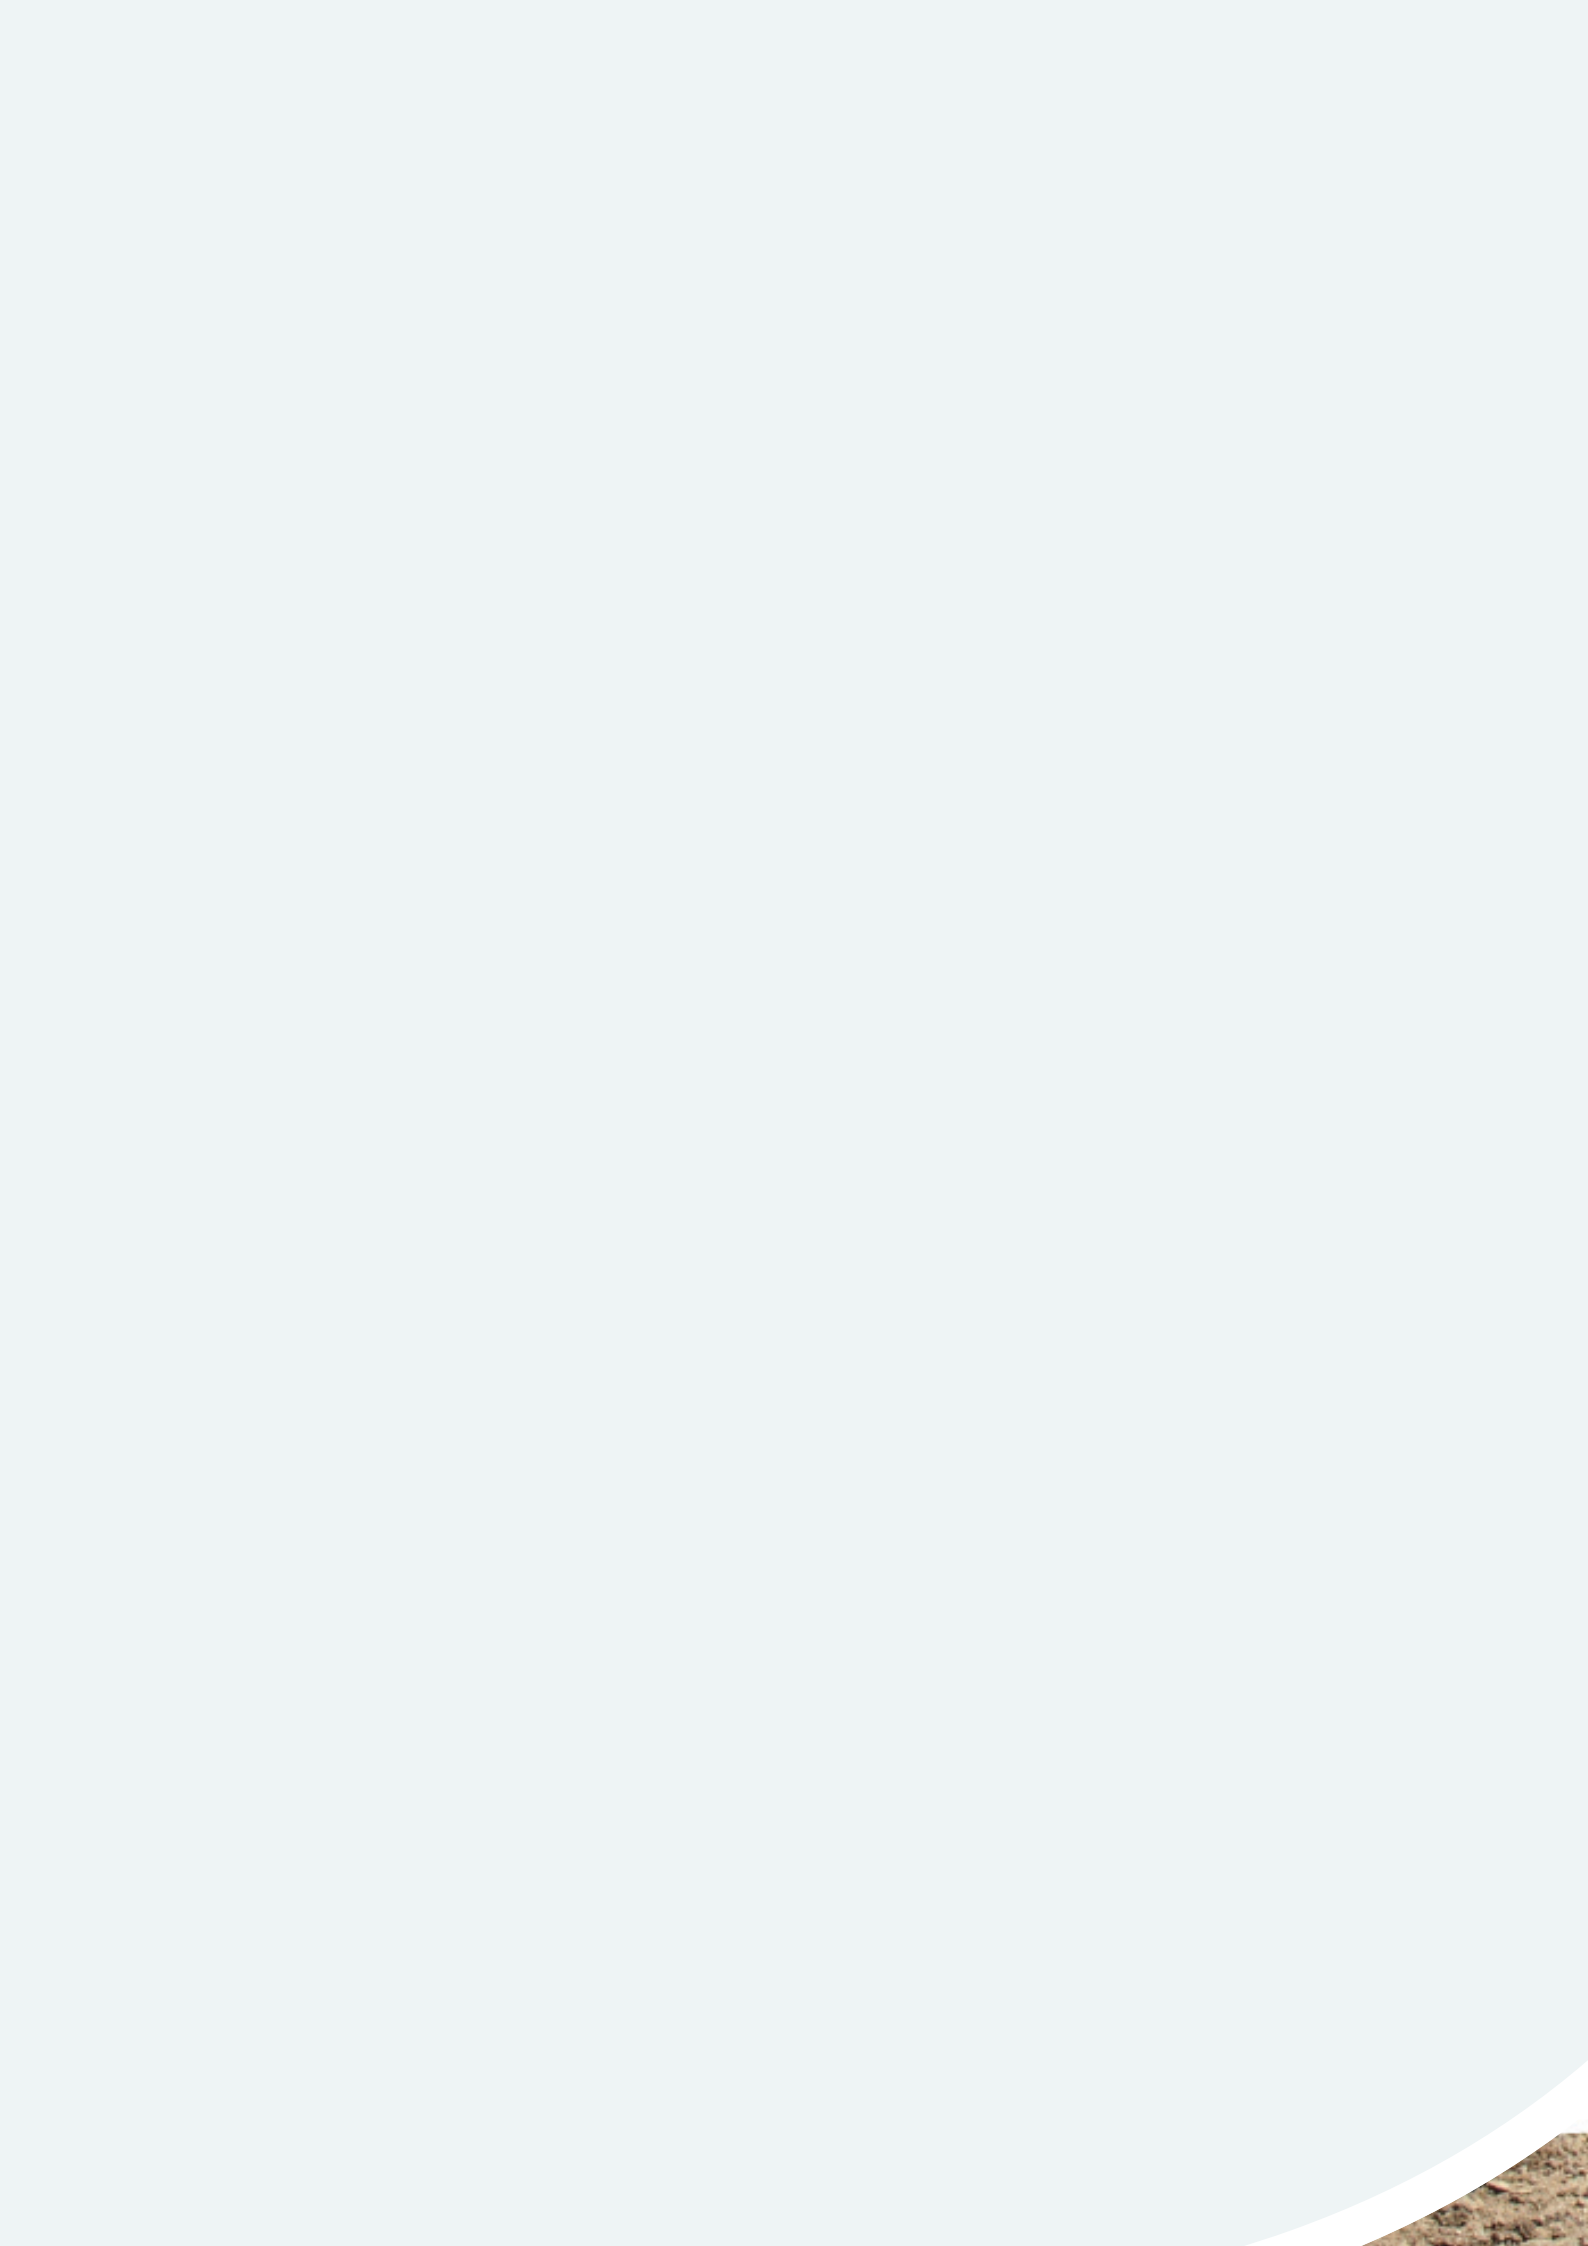




















Miscellaneous



Miscellaneous



Product image	Reference	Description		l—l		PU	
	7066186	Polyamid-wire	0,5 mm	100 m		1	 5 411387 066186
	7067022	Clothes line cable	3,3 mm	60 m		1	 5 411387 067022
	7066766	Clothes line with steel wire core	3,5 mm	20 m		1	 5 411387 066766
	7068104	Hook and loop tape	20 mm	50 cm		1	 5 411387 068104
	7040025	Line tensioner rubber	-	-	-	20	 5 411387 040025
	7067541	Signalling tape	8 cm	50 m		1	 5 411387 067541

SNURO

SNURO IS A TRADEMARK OF:

Corbeo NV

Poldergotestraat 22
9240 Zele - Belgium

Internal sales department

Tel (+32) 52 46 97 80
Fax (+32) 52 47 63 91
Email sales@corbeo.be
www.corbeo.be

